


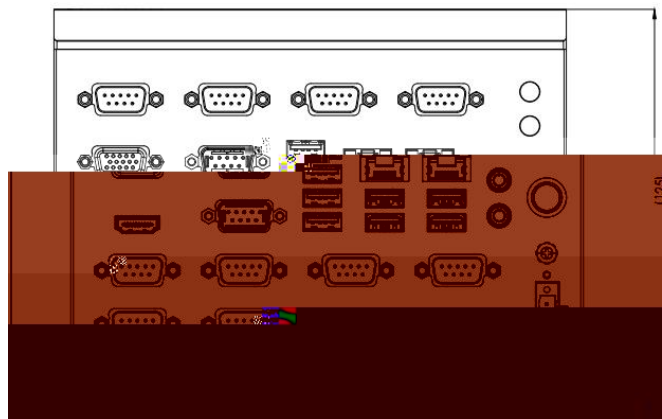


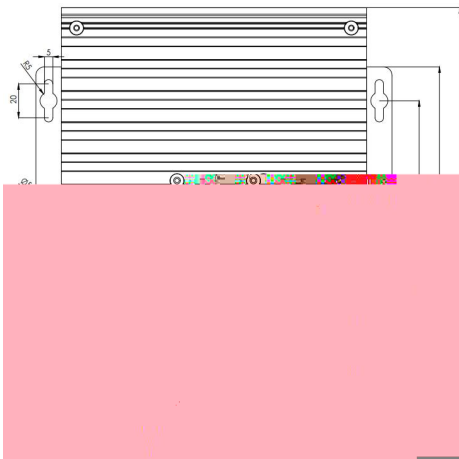

- FT-D2000/8
- 2 DDR4-SODIMM 64GB
- VGA+HDMI
- 8 USB
- 2 RS232/422/485 10 RS232
- 2 GbE LAN
- 1 M.2 B-key 3052 Micro SIM 5G
- DC IN 12V

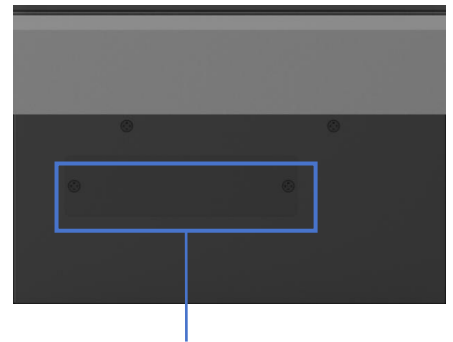

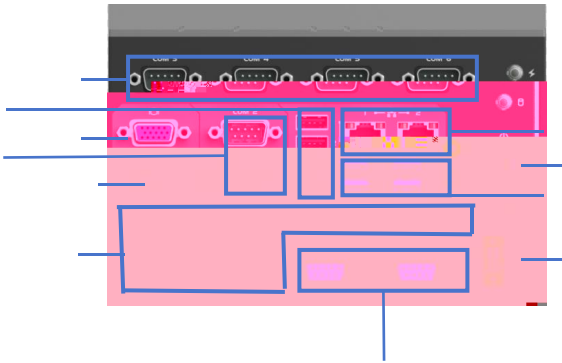

		D2000/8 2.3GHz 8C 25W		
	BIOS	UEFI		
		2x260-pin DDR4 2666MHz SODIMM,max 64GB		
		/ OS		
I/O	USB	4xUSB3.0, 4xUSB2.0		
	COM	2xRS232/422/485 10xRS232		
	GPIO	2xDB9 8bit GPIO		
	LED	1xPower, 1xHDD		
	PCIe/M.2/Mini-PCle	1*Mini-pcie 1x M.2 B-key 3052	Micro SIM	5G
	Interface	1xVGA, VGA 1xHDMI,HDMI	LVDS 1920*1200@60Hz 4096*2160@24Hz	
	Storage Device	2 x 2.5"HDD/SSD		
	Audio IC	Realtek ALC897		
	Audio Interface	1xMic-in, 1xLine-out (amp		
	LAN IC	2x YT8531H-CA		
	Interface	2xRJ45		
	Power Input	12V, DC-in		
	Power Interface	2-Pole Phoenix DC plug in		
	Watchdog Timer	1 to 255 sec./min. per step		
	Dimensions	180mm(W)x125mm(H)x230mm(D)		
	Weight	4.1KG		
	Mounting	Desk/Wall-mounting		
	Operating Temp.	0~50		
	Storage Temp.	-40~85		
	Humidity	10%~85% Humidity, non-condensing		
	Shock	With SSD: 15G, IEC 60068-2-27, half sine, 11ms duration		
	Vibration	With SSD:2Grms, IEC 60068-2-64, random 5~500Hz 1 hr/axis		



			DIMM	LAN	USB3.0	USB2.0	COM	SATA3.0
JVC-8100	D2000	2	2	2	4	4	12	2



JVC-8100	JVC-8100	1
300600018826	120W,AC100~240V,12V,10A,4PIN	1
301800000605	1.5m , -	1
NA	&	1