


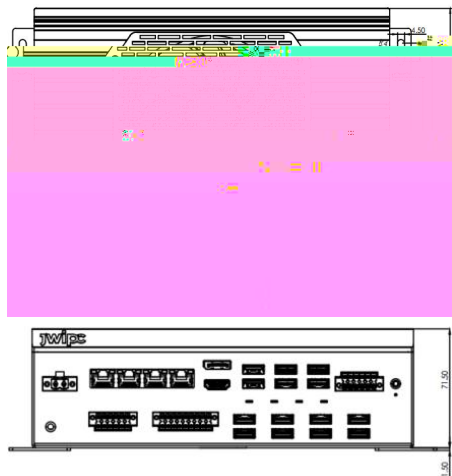


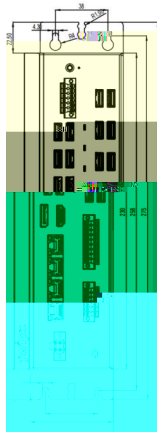

		1 x LGA1700 12&13&14 pin/i7/i5/i3/G CPU,TDP 65W
		H610
	BIOS	AMI UEFI BIOS
		1 x CPU integrated Graphics Engine
		2 DDR5 4800MHz SO-DIMM, 64GB
		Wi-Fi 10, Wi-Fi 11, Li-Fi, Ubuntu 21.04
I/O	USB	4 USB 3.0, 2 USB 2.0 8 USB 3.0 POE
	COM	2 RS485/232 CAN 12Pin 2 RS232/485/422
	CAN	1 CAN COM 12Pin
	GPIO	16 I/O 8
	LED	1 PWR,1 RUN,1 HDD,1 ERR
	M.2	1 M.2 Key B Sata (3042/3052) 4G/5G
	Graphics Port	1 x UHD Graphics 730-770
	Interface	1 DP 1.4 3840 x 2160 @60Hz 1 HDMI 2.0 4096 x 2160 @60Hz
	SATA Drive	1 M.2 Key M Sata (2242/2280,NVME)
	Audio IC	Realtek ALC897
	Audio Interface	Mic-in, Line-out
	LAN	4 x 10GbE LAN (1 x 219V, 2 x 226V, 1 x 210AT)
	Interface	4 RJ45
	Power Input	24V, DC-in
	Power Interface	2Pin
	Watchdog Time	255s /
	TPM	TPM2.0 SLB9670
	Dimensions	230mm (L) 165mm (W) 71.5mm (H)
	Weight	4.68KG
	Mounting	Desktop/Wall-mounting, Dismountable
	Operating Temperature	-40 ~ 55
	Storage Temperature	-40 ~ 85
	Humidity	0 ~ 90% Humidity, Non-condensing
	Shock	SSD 15G, IEC 60068-2-27, half sine, 11ms duration
	Vibration	SSD 2G, IEC 60068-2-64, amplitude 5mm/s 500Hz 1hr/day

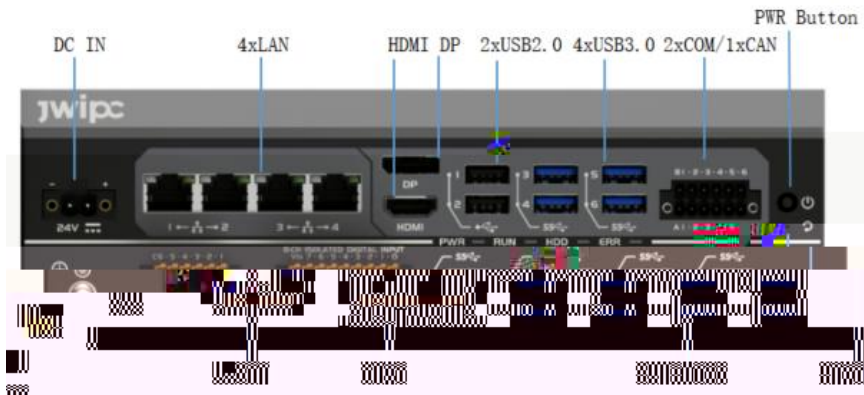

			DIMM	LAN	USB3.0	USB2.0	COM	M.2
PAS-7513	H610	2	2	4	12	2	4	1



PAS-7513	PAS-7513	1
300600013312	,DA-180C24-AAAE,180W,AC100 240V,24V,7.5A,	1
301800000601	F a Cab e,P e , -AC-1.83 - ,3C-250V/10A, XBH- G32-3X0.75 2-	1
302300018249	PAS-7000	1
302300018251	PAS-7000	2
302300000937	DIN	1
302300003412	/	4
302400001697	,	4
302300002007	DIN	4
302300001819		8
301700006521	,2 6Pi	2
301700006523	,2 9Pi	1