

Features

10.1"/10.4"/12.1"/15.0"/15.6"/17"/18.5"/21.5"

LED back light display

Optional capacitive/resistive touch screen, supports 10-point touch

Intel® Core™ Coffee Lake, Z390 PCH

1 x SO-DIMM DDR4-3200, Max 32GB

Support 4 x 1000Mbps ethernet port

Support WiFi, BT, 5G/4G, SSD/HDD function

Support Win7 / Win10 / WIN11 / Linux OS

DC 12-36V wide voltage input, supports

RVP/SCP/OVP/OC


IP65 front panel protection



Windows 11

OM 2/M 2 F:

Product View

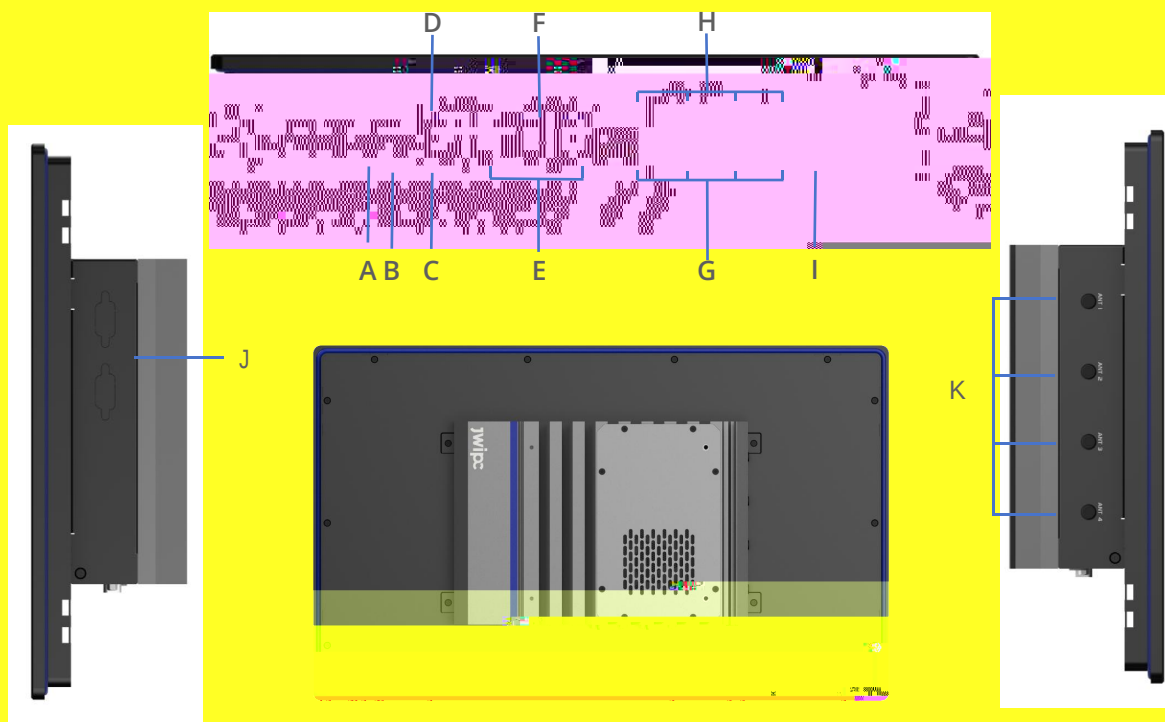

A: Power button

B: remote switch


C: HDMI

D: DP


E: 2xCOM,RS232/422/485

F: ATX/AT switch

IVS-101-CFS (10.1")

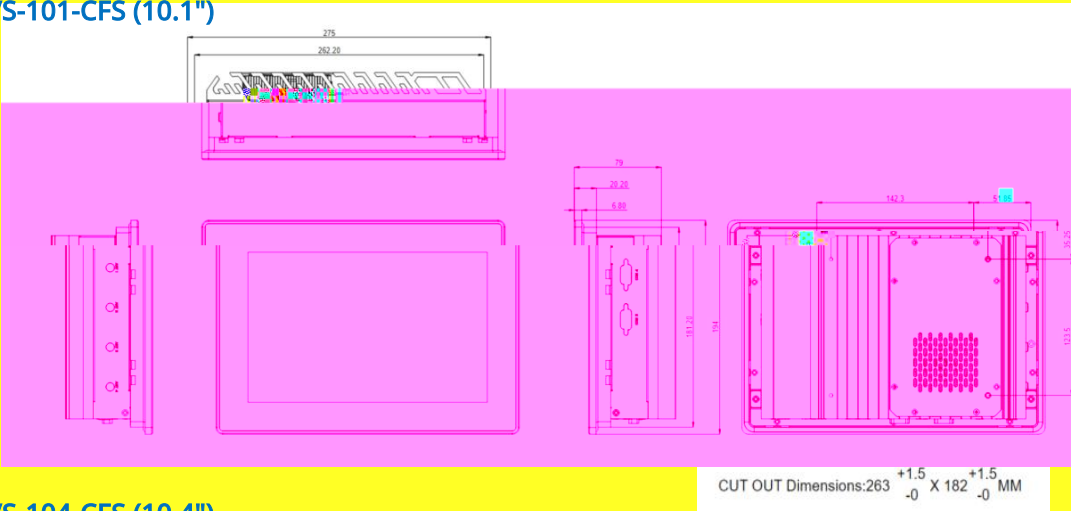

IVS-104-CFS (10.4")

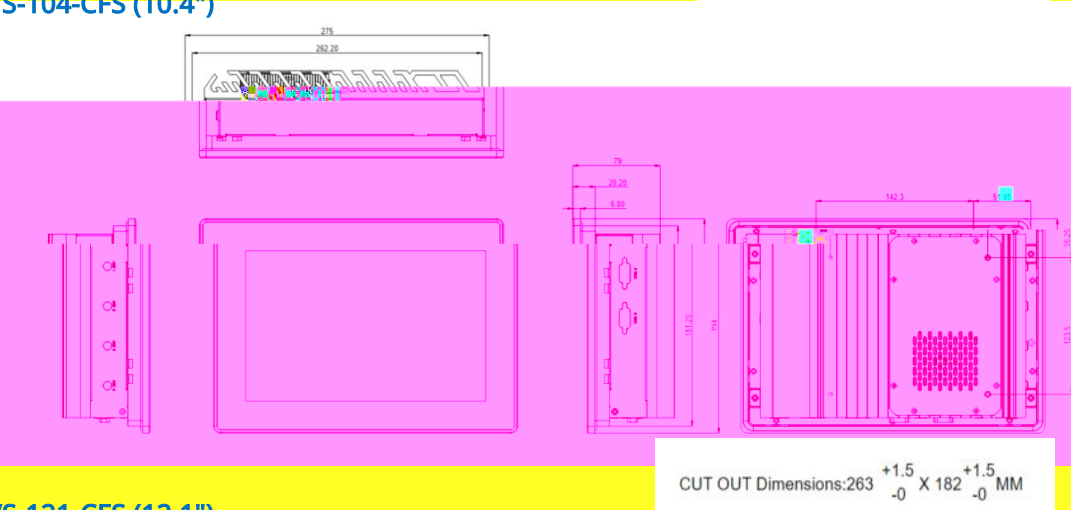


IVS-121-CFS (12.1")




Z390 PCH

Integrated Data Visualization System

IVS-150-CFS (15")

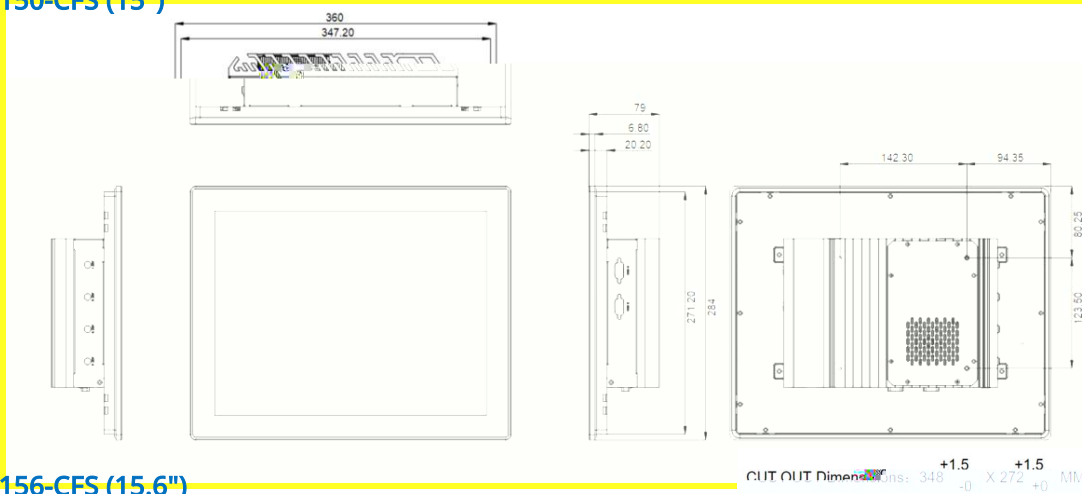


IVS-156-CFS (15.6")

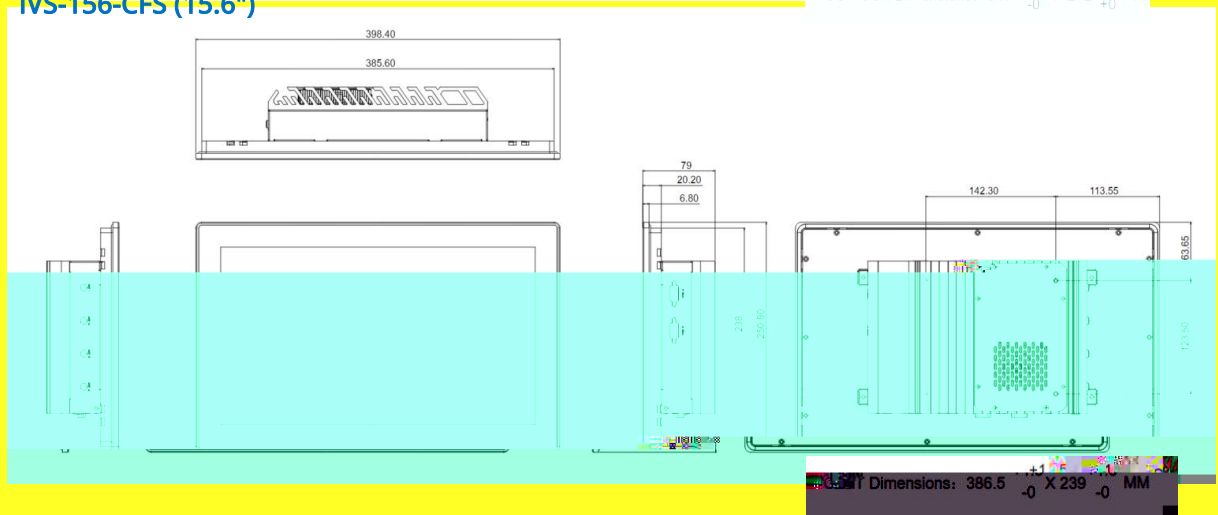


IVS-170-CFS(17")



IVS-185-CFS (18.5")

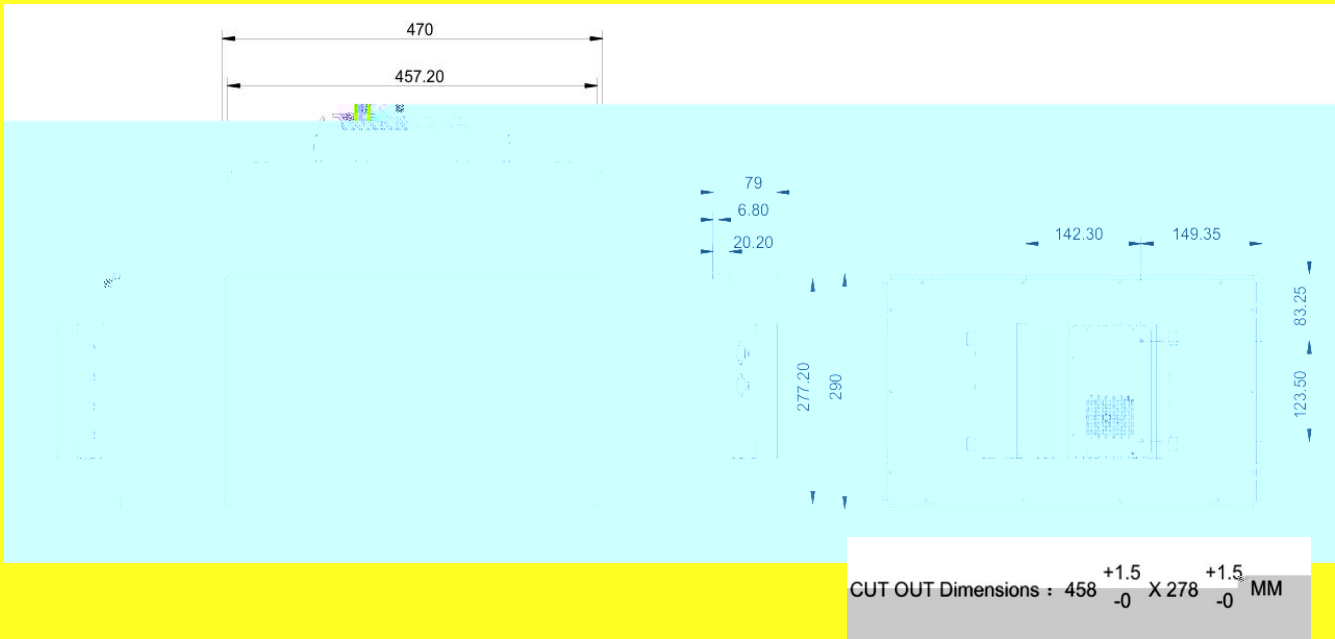

IVS-215-CFS(21.5")

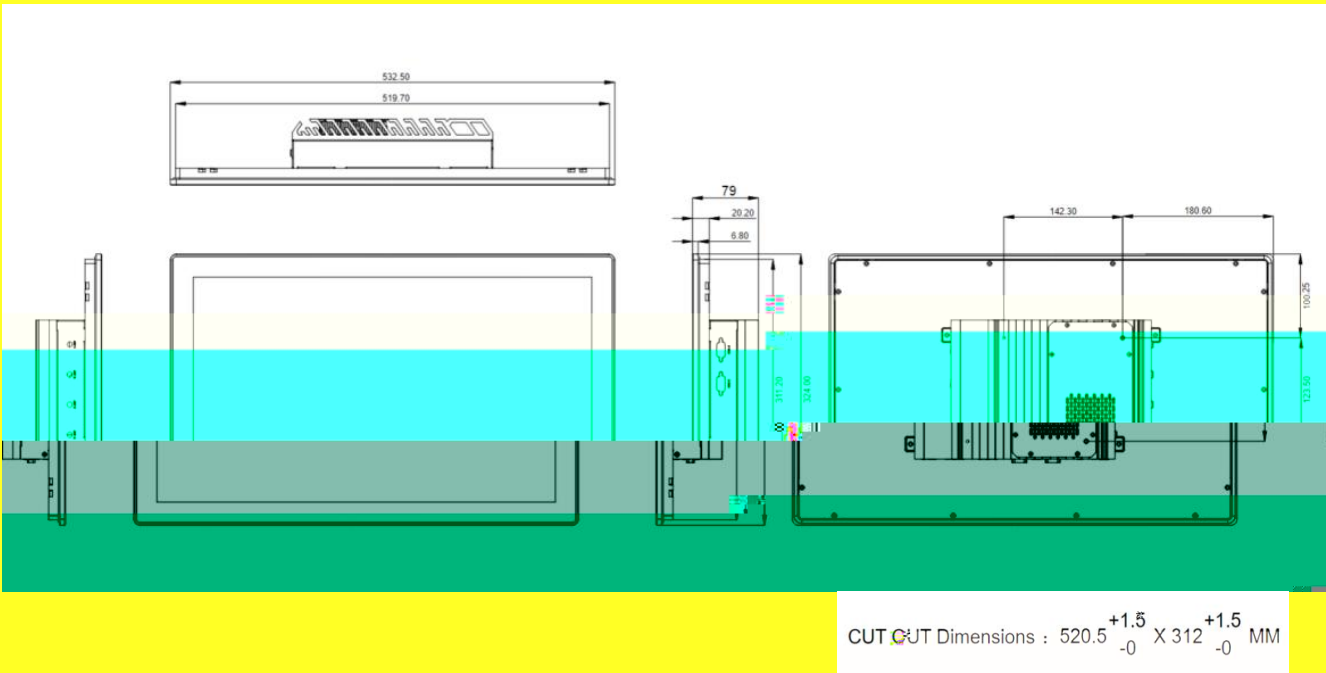

Processor	CPU	Z390 PCH,support Intel® Core™ 6/8/9th i9/ i7/i5/i3 LGA1151 type CPU. Max.65W TDP							
Memory	Memory Solt	1 x SO-							

Model	Processor	Touch Type	Resolution	LAN	USB3	COM
IVS-101C-CFS	Z390 PCH	Capacitive	1280 x 800	4	4	2
IVS-104C-CFS	Z390 PCH	Capacitive	1024x768	4	4	2
IVS-121C--CFS	Z390 PCH	Capacitive	1024x768	4	4	2
IVS-150C--CFS	Z390 PCH	Capacitive	1024x768	4	4	2
IVS-156C--CFS	Z390 PCH	Capacitive	1920x1080	4	4	2
IVS-170C--CFS	Z390 PCH	Capacitive	1080x1024	4	4	2
IVS-185C--CFS	Z390 PCH	Capacitive	1920x1080	4	4	2
IVS-215C--CFS	Z390 PCH	Capacitive	1920x1080	4	4	2

Packing List

Part No.	Description
300600023479	Power Adapter,HKA15019079-6C,150W,100Vac~240Vac,18.05V ~ 19.95V,7.9A,2 Pin,ccc,0~~40 ,ASS,HuntKey
301800000605	Flat Cable,Power ,external power cord-L=1.5M, national standard three-plug XBH-G31 with plum blossom tail XBH-2C5, RVV 300/500V,3X0.75mm2, black, PK, RoHS, XBH
302700002073	Certificate of conformity, Certificate of Conformity (green triangle)

Optional accessories

Spare Part	Description
DDR4 SO-DIMM	SO-DIMM Max 32GB
SSD	M.2 SSD support 128GB,256GB,512GB,1TB,2TB
HDD	2.5" HDD support 128GB,256GB,512GB,1TB,2TB choose motherboard that supports SATA sockets
4G/5GModule	4G/5GModule with Antenna
WiFi & Bluetooth Module	WiFi & Bluetooth Module with Antenna
Touchscreen surface treatment	Touchscreen surface treatment AG AF
COM cable	2xRS232 COM cable
POE Card	PPB-4POE,V0.1
Transfer bracket	Metal structure, 75_100_VESA_BKT_ASM, VESA adapter bracket
I/O Connector	Pin e e a, 2P , 3.81
Embedded buckle	Metal structure, Fixed_button, Fixed_button_Assembly, SUS304, T=3.0, 24x21.7x23mm, Brushed 180 mesh, Natural color